

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.20	LIUZH	JIN

- Material
 ØScrews : M3 steel, Ni plated
 ØTerminal : Brass, Tin plated
 ØHousing : PA66,UL94V-0






- Electrical IEC
 Rated voltage : 300V 450V
 Rated current : 25A 24A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min
 Wire range: 22-12AWG 2.5mm²

- Mechanical
 Operating temperature:-40°C~+105°C
 Soldering temperature:250°C±5/5sec
 Torque: 0.5N.m (4.43lb.in)

• RoHS compliance

HOW TO ORDER

2HB-850-8.5-XXP-1 X-XXXXX

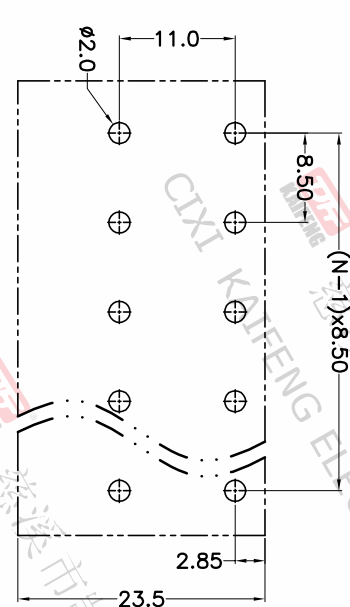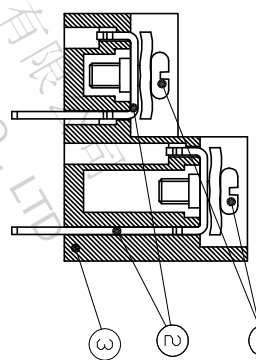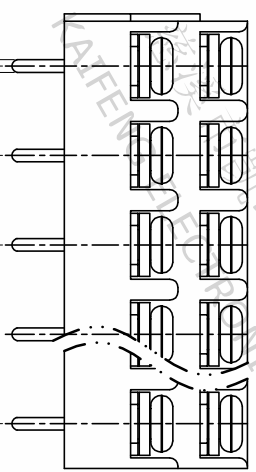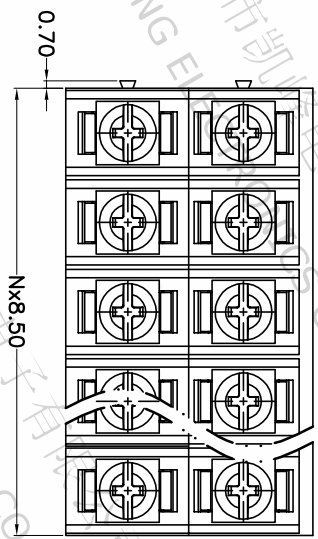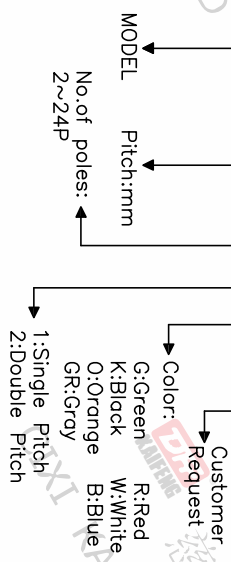

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	~30	□
~10	~60	□
~24	~100	□
~30	~150	□
±0.15	±0.30	±2°
±0.20	±0.50	□
±0.30	±0.70	□
±1.00	±1.30	□

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W12000412

PROJECTION	TITLE
UNIT	2HB-850-8.5-XXP-1X
mm	
SHEET SIZE	A4
SERIES	2HB-850

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

