
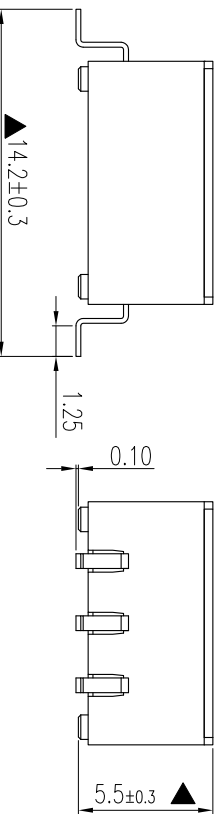
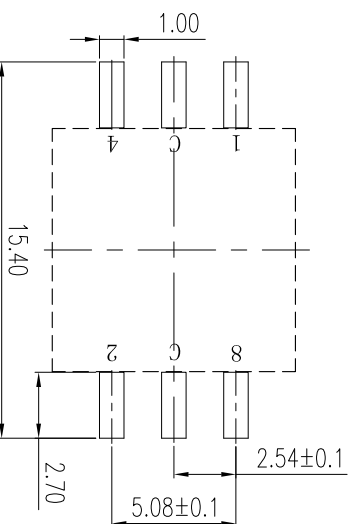



REV	ECN	CONTENT	CHECK	DATE
V0.0		ORIGINAL	ZY	2019.01.22

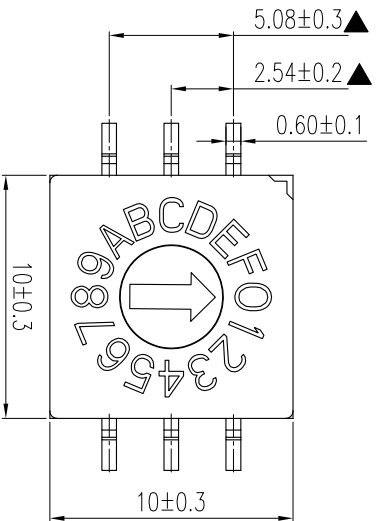

- SPECIFICATION:
- Rating: 25mA, 24VDC
Switching: 100mA, 50VDC
Non-Switching: 100mA, 50VDC
 - Contact Resistance: 50mΩ max
Initial: 50mΩ max
After Life Test: 100mΩ max
 - Insulation Resistance: 100MΩ min/250 VDC
 - Withstand Voltage: 250VAC for 1 minute
 - Operation Force: 500gf. cm max
 - Mechanical Life: min 10000 steps
 - Operation Temperature: -40°C ~ +85°C
 - Storage Temperature: -40°C ~ +85°C
 - “▲” the critical dimension
 - RoHS Compliance

SOLDERING INFORMATION:

Reflow Soldering: 240°C (20S max), Peak Temperature 260°C,
Manual Soldering: 30W iron, 320±5°C, 3S max

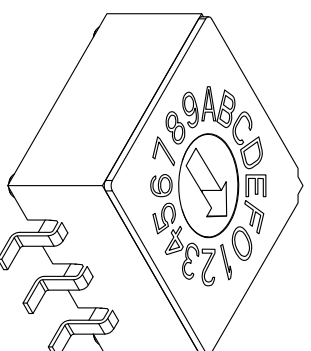

○ ON	POSITION	CODE	HOW TO ORDER:										
● OFF	CHAR16C		6KF001	B-3	S	1	6	R	5	-0-	X	X	X

A: DIP Type
 B: SMD Type
 Terminals:
 4: 4X1
 3: 3X3
 2: 3X2
 S: Standard (Gray)
 R: Real Codes
 C: Printing Reverse
 10: 10 steps
 16: 16 steps
 Special number
 0: Tube
 1: Tape&Reel
 4: 4.5mm High
 5: 5.5mm High

General tolerance in mm	radii and chamfers	shorter angle side	≡	—	//
over 0.5 to 3	over 0.5 to 3	over 10 to 50	all	over 0 to 100	over 100 to 150
over 0.15 to 3	over 0.2 to 3	over 10 to 50	±1°	over 0.5 to 1.0	over 0.2 to 0.5

APP.	Cain	DATE	2018.12.12	NAME	6KF001B-3S16R5-0
CHK.	LJ	DATE	2018.12.11	DWGNO.	6KF001B-3S16R5-0.DWG
DWG.	ZY	DATE	2018.12.10	SHEET	1/1
UNITS	MM	SCALE	1:1	PROJECTION-METHOD	☉

慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONIC CO. LTD