

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN



- Material
 ØHousing : PA66, UL94V-0
 ØPin header : Copper alloy, Tin plated
 ØNut : M2.5,Copper alloy

- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 15A 20A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min

- Mechanical
 Operating temperature: -40°C~+105°C
 Soldering temperature:250°C±5/5sec

- RoHS compliance

HOW TO ORDER
 KF1024B-5.08-XXP-1 X-XXXXX

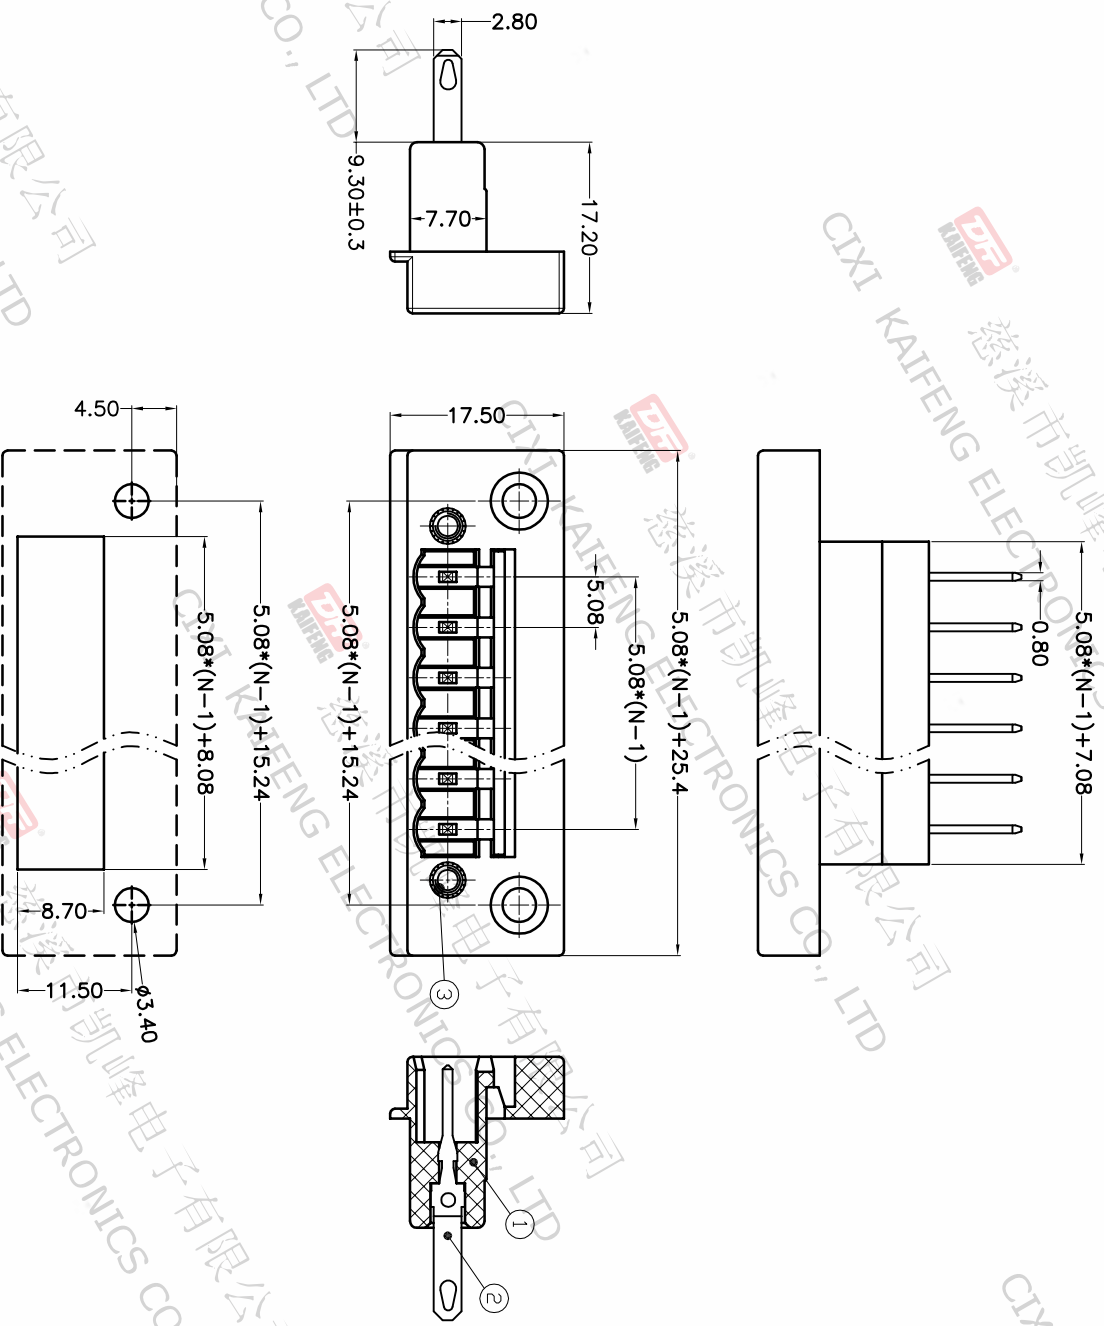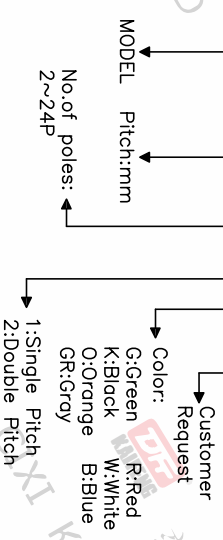

Pitch range	Nominal dimension range	PROJECTION
>0	>30	0.1/10
~6	~60	~
~10	~100	~
~24	~150	~
±0.15	±0.30	±2°
±0.20	±0.50	±2°
±0.30	±0.70	±2°
±0.50	±1.00	±2°
±1.00	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10001662

PROJECTION	UNIT	TITLE
UNIT	mm	KF1024B-5.08-XXP-1X
SHEET SIZE	A4	
SERIES	KF1024B	

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD