



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.19	DENG	JIN

- Material
 ①Screws : M2.0 steel, Zinc plated,
 - slot type
 ②Housing : PA66, UL94V-0
 ③Clamp : Copper alloy, Ni plated
 ④Pin header : Copper alloy, Tin plated

- Electrical
 UL IEC
 Rated voltage : 300V 130V
 Rated current : 10A 10A
 Contact Resistance: 20mΩ
 Insulation resistance: 500MΩ/1000V
 Withstanding Voltage : AC1500V/1min
 Wire range: 24-16AWG 1.5mm²

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5/5sec
 Torque: 0.2N.m (1.77Lb.in)
 Strip length: 5-6mm
- RoHS compliance

HOW TO ORDER
 KF124G-3.5-XXP-1 X-XXXXX

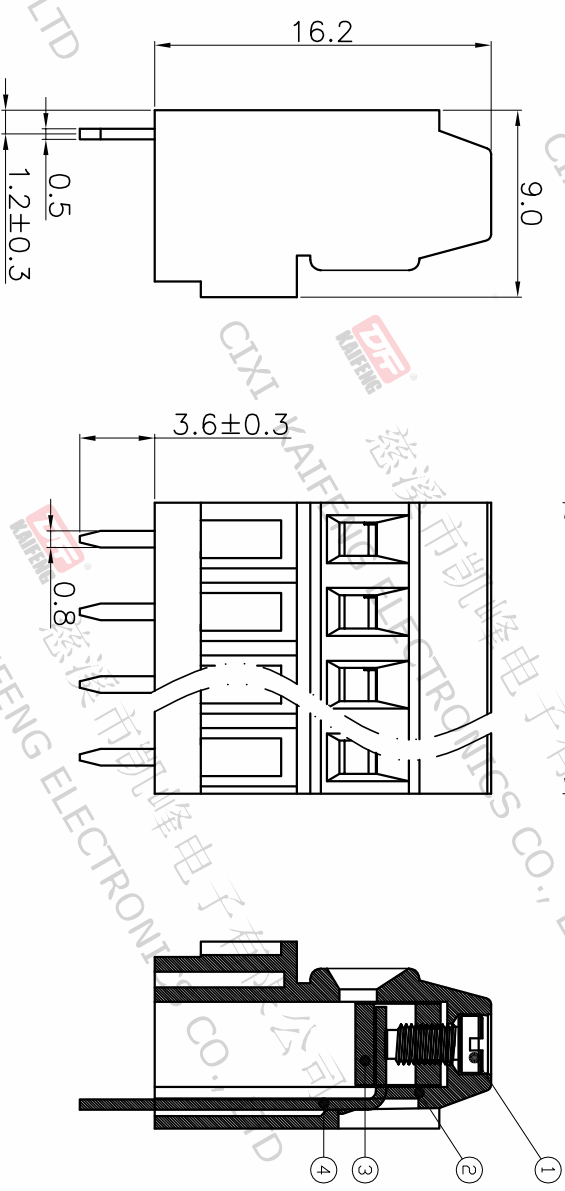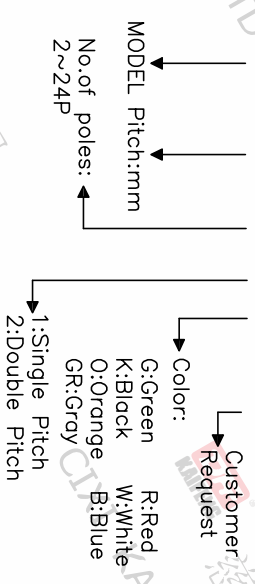

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>30	0.1/10
~6	~60	∠
~10	~100	∠
~24	~150	∠
±0.15	±0.30	±2°

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W15000442	SHEET SIZE	A4
		SERIES	KF142G
		TITLE	KF124G-3.5-XXP-1X

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD