
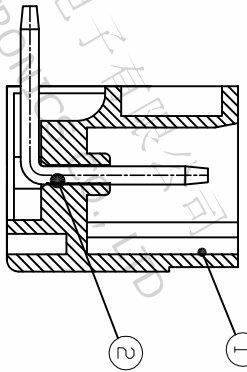
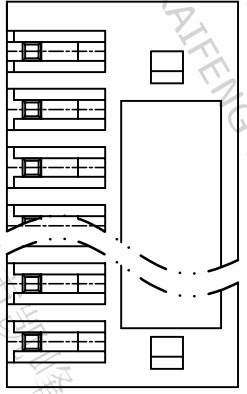



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

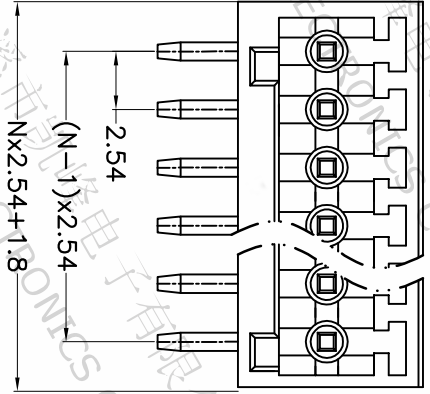


- Material  
 ①Housing : PA66, UL94V-0  
 ②Pin header : Copper alloy, Tin plated
- Electrical  
 UL IEC  
 Rated voltage : 150V 130V  
 Rated current : 5A 10A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC1250V/1min
- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec
- RoHS compliance

HOW TO ORDER

KF12EZR-2.54-XXP-1 X-XXXXX

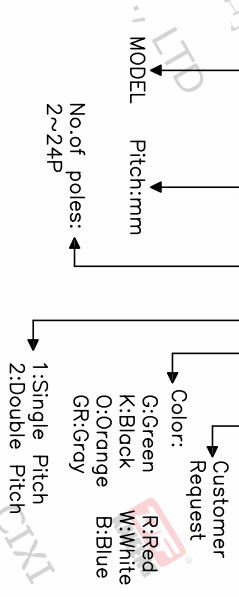

P.C.B.LAYOUT

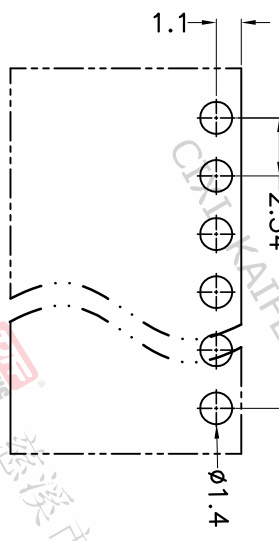

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	~30	~
~10	~60	~
~24	~100	~
~30	~150	~
±0.15	±0.30	±2°
±0.20	±0.50	±2°
±0.30	±0.70	±2°
±1.00	±1.30	±2°

**DFE** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO.,LTD

**PROJECTION** UNIT mm

**SHEET SIZE** A4

**SERIES** KF12EZR

**TITLE** KF12EZR-2.54-XXP-1X

**DRAWING TYPE** CUSTOMER DRAWING

**SCALE** 1:1

**SHEET** 1 OF 1

**DRAWING NO.** W10001522