
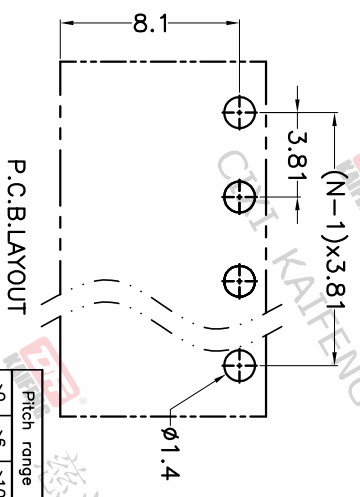


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.08	ZHANG	JIN

- Material  
 @Housing : PA66, UL94V-0  
 @Pin header : Copper alloy, Tin plated
- Electrical  
 UL IEC  
 Rated voltage : 300V 250V  
 Rated current : 8A 7A
- Mechanical  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC1500V/1min
- RoHS compliance

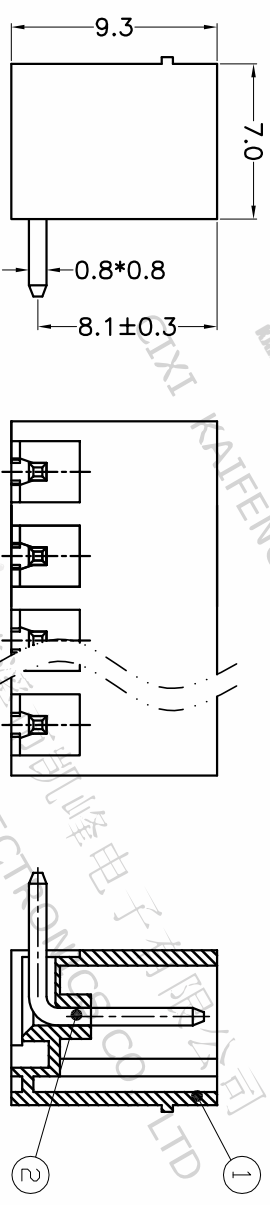

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	□	mm	KF2EDGR-Y-3.81-XXP-1X
>6	>30	□	mm	
~10	>60	□	mm	
~24	~100	□	mm	
~30	~150	□	mm	
±0.15 ±0.20 ±0.30 ±0.50	±0.30 ±0.50 ±0.70 ±1.00 ±1.30	□	mm	

HOW TO ORDER  
 KF2EDGR-Y-3.81-XXP-1 X-XXXXX

MODEL Pitch:mm

No.of poles: 2~24P

Color: Request  
 G:Green R:Red  
 K:Black W:White  
 O:Orange B:Blue  
 GR:Gray

1:Single Pitch  
 2:Double Pitch

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	W10000872

**DFE**  
 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD