REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

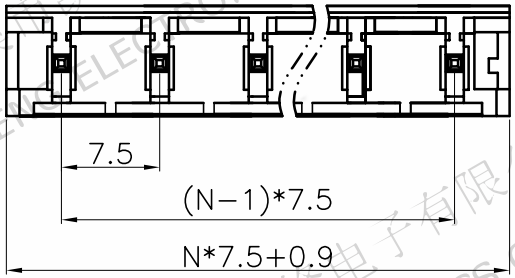



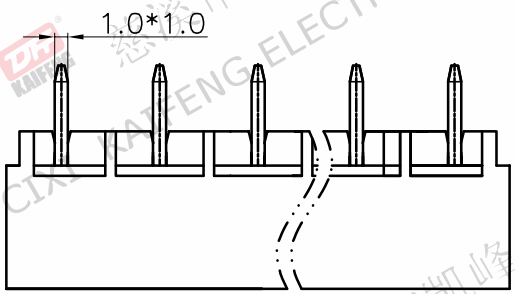



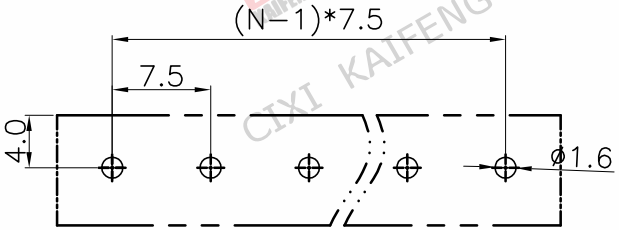

P.C.B.LAYOUT

- Material
  - ①Housing: PA66, UL94V−0
  - ②Pin header:Copper alloy,Tin plated
- Electrical

	UL	IEC
Rated Voltage:	300V	630V
Rated Corrent:	15A	16A

  - Contact Resistance: 20mΩ
  - Insulation Resistance: 500MΩ/DC500V
  - Withstanding Voltage: AC1500V/1Min
- Mechanical
  - Temperature Range: −30℃～ +105℃
  - MAX Soldering: +250℃,(5 Seconds)
- RoHS compliance

HOW TO ORDER

KF475−V1−7.5−XXP−1 X−XXXXX

- KF475−V1 → MODEL
- 7.5 → Pitch:mm
- XXP → No.of poles: 1~99P
- 1 → 1:Single Pitch, 2:Double Pitch
- X → Color: G:Green, R:Red, K:Black, W:White, O:Orange, B:Blue, GR:Gray
- XXXXX → Customer Request

Pitch range			Nominal dimension range						
>0 ~ 6	>6 ~ 10	>10 ~ 24	>0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	0.1/10	∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

DRAWING TYPE	CUSTOMER DRAWING		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W16000182		

PROJECTION		TITLE	KF475−V1−7.5−XXP−1X
UNIT	mm		
SHEET SIZE	A4	SERIES	KF4751

®慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO., LTD